

P325



CONICAL ANTI-VIBRATION MOUNT WITH THREADED STUD

Materials:

Natural rubber (NR),

Rubber hardness:

Hardness 55 Shore A (tolerance $\pm 5\%$).

Surface finish:

Smooth.

Colour:


Black (RAL 9011).

Inserts:

- (1) Galvanised boron steel threaded stud (thread tolerance 6g).
- (2) Galvanised weldable steel washer.

Special requests:

- Upon request and for a minimum quantity of 100 pieces anti-vibration mounts can be supplied with hardness 45 or 70 Shore A.
- Upon request and for a minimum quantity of 100 pieces anti-vibration mounts can be supplied in different materials:
- P326= SBR
- P327= NBR
- P328= EPDM

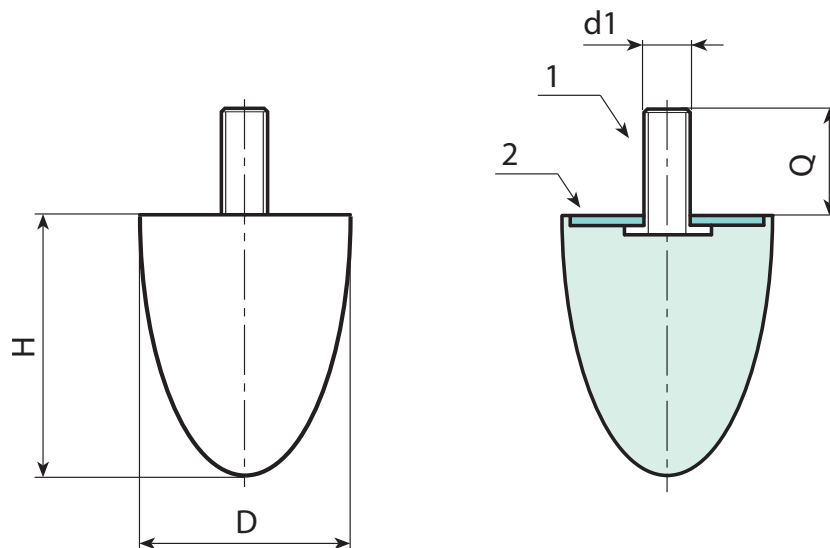

P

Code	Art.	D	H	d1 _{6g}	Q	g
-	P325020.F24M06X1855	20	24	M6	18	10
-	P325025.F25M06X1855	25	25	M8	18	12
-	P325030.F36M08X2055	30	36	M8	20	35
-	P325035.F40M08X2355	35	40	M8	23	47
-	P325050.F60M10X2855	50	60	M10	28	117
-	P325050.F67M10X2855	50	67	M10	28	125