

R610



POLYPROPYLENE / RUBBER WHEEL WITH RIGID STEEL FORK AND SMOOTH THROUGH BORE

Materials:

Wheel body:

Polypropylene.

Tread:

Synthetic thermoplastic rubber. Hardness 93 ± 3 Shore A.

Surface finish:

Smooth.

Colour:

- (1) Dark grey.
- (2) Light grey.
- (3-4-5-6-7) Galvanised blue.

Wheel rotation (4):

The hole for the pivot pin is formed by plastic moulding. A galvanised steel tube is positioned between the stud and the hole for protection.

Bracket (3):


Steel (DD13) fork, with mounting hole (hole tolerance H7).

Wheel fastening (6):

Steel hex head screw, coupled with a steel nut.

Special requests:

- Upon request the wheel can be supplied in material with high electrical conductivity (ESD).

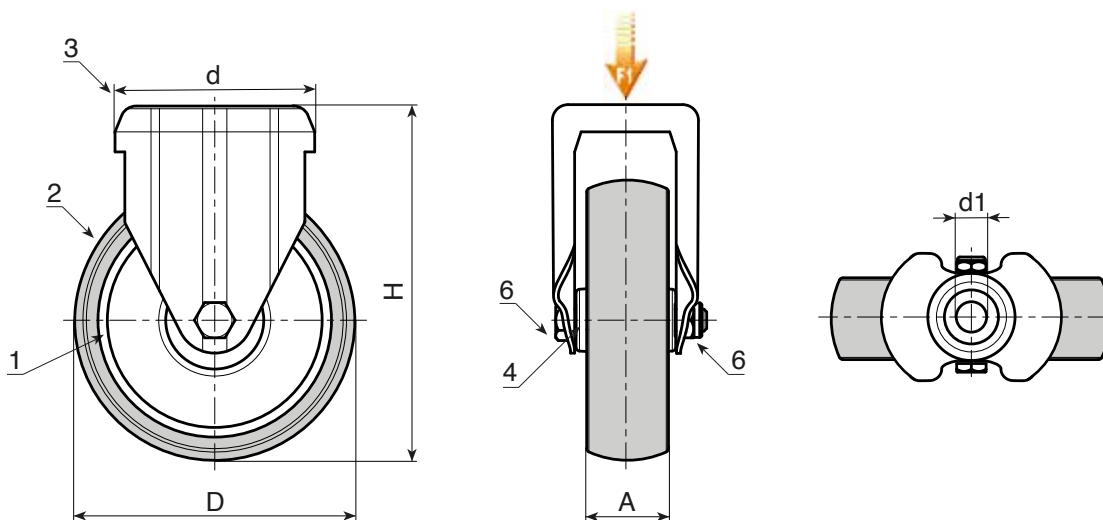

Version: standard.

Code	art.	D	A	H	d	d1H7	g	F1 (Kg)
-	R610050.T18D12	50	18	70	48	12	-	40
-	R610063.T22D12	63	22	90	48	12	-	60
-	R610080.T22D12	80	22	109	48	12	-	60
-	R610100.T27D12	100	27	134	57	12	-	80
-	R610125.T27D12	125	27	159	57	12	-	80

Version ESD: with wheel in conductive material.



Code	art.	D	A	H	d	d1H7	g	F1 (Kg)
-	R610050.T18D12ESD	50	18	70	48	12	-	40
-	R610060.T22D12ESD	60	22	90	48	12	-	60
-	R610080.T24D12ESD	80	24	109	48	12	-	60
-	R610100.T29D12ESD	100	29	134	57	12	-	80
-	R610125.T29D12ESD	125	29	159	57	12	-	80